


## CABLE LEGEND

- = 75Ω BNC HD-SDI
- = 3.5mm Stereo Analog Audio
- = RJ45 CAT-6 Gig-E
- = 75Ω BNC Analog REF
- = 75Ω BNC AES Stereo Digital Audio
- = 3-Pin XLR Analog LTC
- = 75Ω BNC Analog LTC
- = 9D RS422
- = RJ45 RS422 (9D adaptors provided)
- = RJ45 ChA-ChD DABP Link
- = RJ45 ChE-ChH DABP Link
- = USB 2.0 RS422 Link
- = eSATA Port
- = 15D Analog VGA
- = Digital DVI-D

Digital Video Production Server  
 Standard Configuration: Embedded Audio Only  
 Video / Audio / Control Diagram

REVISED: 06 SEPTEMBER, 2011

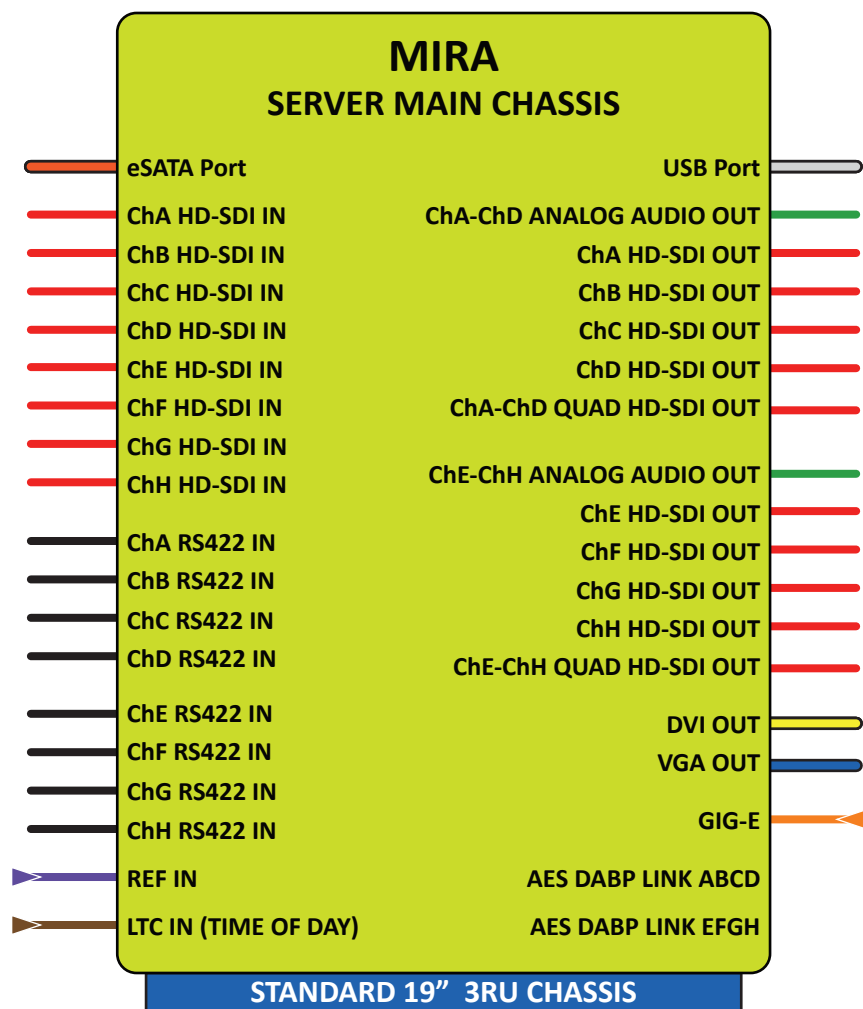

**CABLE LEGEND**

- |                                     |                          |
|-------------------------------------|--------------------------|
| = 75Ω BNC HD-SDI                    | = RJ45 ChA-ChD DABP Link |
| = 3.5mm Stereo Analog Audio         | = RJ45 ChE-ChH DABP Link |
| = RJ45 CAT-6 Gig-E                  | = USB 2.0 RS422 Link     |
| = 75Ω BNC Analog REF                | = eSATA Port             |
| = 75Ω BNC AES Stereo Digital Audio  | = 15D Analog VGA         |
| = 3-Pin XLR Analog LTC              | = Digital DVI-D          |
| = 75Ω BNC Analog LTC                |                          |
| = 9D RS422                          |                          |
| = RJ45 RS422 (9D adaptors provided) |                          |